



OMNITEMP REFRIGERATION PRODUCTS

OTM-OTF SERIES


UNDERCOUNTER EVAPORATOR COILS



FEATURES:

- PRECISION DIGITAL CONTROL • COMPACT DESIGN • QUIET FAN TECHNOLOGY
- RELIABLE COOLING FOR COMMERCIAL APPLICATIONS.

SCAN FOR
SPECIFICATIONS



PRODUCT SPECIFICATIONS & FEATURES - EDITION 2026

www.omnitemaminc.com



OmniTemp Undercounter Wall Mount Evaporator



Key Features & Benefits

- Standard 115 volt operation (Optional 208 volt)
- Coil housings are made of 304 stainless steel
- Reversible drain pans
- Temperature control with programable defrost system
- All hardware is made of 304 stainless steel
- Pre-piping options: Exit Left, Right or Back
- Motors can be changed without removing coil
- Exclusive Omni corrosion resistant coated fin stock on medium temperature coils
- Medium and low temperature applications (electric defrost)
- Mounted drain pan furnishes proper drain slope
- Internal terminal block for electrical connection


Options

- 208 volt 1 phase operation for either domestic or export projects
- Vertical air discharge - optional 45 degree deflector
- Full Prep- basic unit plus factory mounted expansion valve, solenoid valve, thermostat and liquid line strainer
- Slave coil - basic unit plus factory mounted expansion valve only
- Liquid and suction lines are piped out, sealed, tested and shipped under dry nitrogen pressure

Technical Specifications

Model	OTM-Series
Application Focus	Undercounter Refrigerators
Housing Material	Stainless Steel
Voltage	115V / 60Hz
Defrost Method	Air Defrost/Electric Defrost
Refrigerant Compatibility	R-454C / R-448A / R-449A / R-404A

WALL MOUNT EVAPORATOR COIL

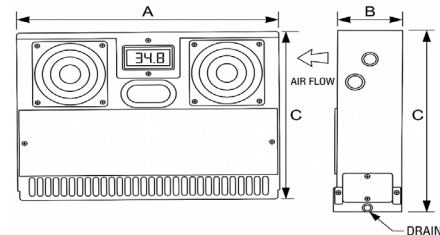

Performance \ Dimensions \ Electrical Data

		OT COIL MODEL	BTUH 10°F TD		DIMENSIONAL DATA			TOTAL CFM	FAN 115V AMPS	DEFROST AMPS	COIL WEIGHT	LIQUID LINE	SUCTION LINE	DRAIN SIZE
			-10°F	+20°F	A	B	C							
SINGLE DISCHARGE	MEDIUM TEMP	OTM-08		800	16-7.8"	5"	12-1/4"	100	0.18		11	1/4"	3/8"	5/8"
		OTM-10		1000	16-7.8"	5"	14"	200	0.36		16	1/4"	3/8"	5/8"
		OTM-12		1200	16-7.8"	5"	14"	200	0.36		17.5	1/4"	3/8"	5/8"
		OTM-13		1300	20-1/4"	5"	14"	200	0.36		14.5	1/4"	3/8"	5/8"
		OTM-15		1500	20-1/4"	5"	14"	200	0.36		19	1/4"	3/8"	5/8"
		OTM-17		1700	20-1/4"	5"	14"	300	0.54		20	1/4"	3/8"	5/8"
		OTM-20		2000	23-1/2"	5"	14"	300	0.54		22	1/4"	3/8"	5/8"
SINGLE DISCHARGE	LOW TEMP													
		OTF-09	900		16-7.8"	5"	14"	200	0.36	5.0	17	1/4"	3/8"	5/8"
		OTF-11	1100		16-7.8"	5"	14"	200	0.36	5.0	18	1/4"	3/8"	5/8"
		OTF-12	1200		20-1/4"	5"	14"	200	0.36	5.0	19	1/4"	3/8"	5/8"
		OTF-13	1300		20-1/4"	5"	14"	200	0.36	6.25	20	1/4"	3/8"	5/8"
		OTF-15	1500		20-1/4"	5"	14"	300	0.54	6.25	21	1/4"	3/8"	5/8"
		OTF-18	1800		23-1/2"	5"	14"	300	0.54	6.25	23	1/4"	3/8"	5/8"

OmniTemp Undercounter Center Mount Double Discharge Evaporator



Key Features & Benefits


- Standard 115 volt operation (Optional 208 volt)
- Coil housings are made of 304 stainless steel
- Reversible drain pans
- Temperature control with programmable defrost system
- All hardware is made of 304 stainless steel
- Pre-piping options: Exit Left, Right or Back
- Motors can be changed without removing coil
- Exclusive Omni corrosion resistant coated fin stock on medium temperature coils
- Medium and low temperature applications (electric defrost)
- Mounted drain pan furnishes proper drain slope
- Internal terminal block for electrical connection

Options

- 208 volt 1 phase operation for either domestic or export projects
- Vertical air discharge - optional 45 degree deflector
- Full Prep- basic unit plus factory mounted expansion valve, solenoid valve, thermostat and liquid line strainer
- Slave coil - basic unit plus factory mounted expansion valve only
- Liquid and suction lines are piped out, sealed, tested and shipped under dry nitrogen pressure

Technical Specifications

Model	OTM-Series
Application Focus	Undercounter Refrigerators
Housing Material	Stainless Steel
Voltage	115V / 60Hz
Defrost Method	Air Defrost/Electric Defrost
Refrigerant Compatibility	R-454C / R-448A / R-449A / R-404A



Performance \ Dimensions \ Electrical Data

DOUBLE DISCHARGE COILS SUPPLIED WITH BRACKETS TO MOUNT COIL ON CEILING

		OT COIL MODEL	BTUH 10°F TD		DIMENSIONAL DATA			TOTAL CFM	FAN 115V AMPS	DEFROST AMPS	COIL WEIGHT	LIQUID LINE	SUCTION LINE	DRAIN SIZE
			-10°F	+20°F	A	B	C							
DOUBLE DISCHARGE	MEDIUM TEMP													
		OTMD-10		1000	16-7.8"	4-1/2"	14"	200	1.2		20	1/4"	3/8"	5/8"
		OTMD-12		1200	16-7.8"	4-1/2"	14"	200	1.2		25	1/4"	3/8"	5/8"
		OTMD-13		1300	20-1/4"	4-1/2"	14"	200	2		29	1/4"	3/8"	5/8"
		OTMD-15		1500	20-1/4"	4-1/2"	14"	200	2		30	1/4"	3/8"	5/8"
		OTMD-17		1700	20-1/4"	4-1/2"	14"	300	2		38	1/4"	3/8"	5/8"
DOUBLE DISCHARGE	LOW TEMP													
		OTF-09	900		16-7.8"	4-1/2"	14"	200	1.2	5.0	22	1/4"	3/8"	5/8"
		OTF-11	1100		16-7.8"	4-1/2"	14"	200	1.2	5.0	27	1/4"	3/8"	5/8"
		OTF-12	1200		20-1/4"	4-1/2"	14"	200	2	5.0	30	1/4"	3/8"	5/8"
		OTF-13	1300		20-1/4"	4-1/2"	14"	200	2	6.25	32	1/4"	3/8"	5/8"
		OTF-15	1500		20-1/4"	4-1/2"	14"	300	2	6.25	40	1/4"	3/8"	5/8"



OmniTemp UNDERCOUNTER CEILING MOUNT EVAPORATOR



Key Features & Benefits:


- Standard 115 volt operation (Optional 208 volt)
- Coil housings are made of 304 stainless steel
- Reversible drain pans
- Temperature control with programable defrost system
- All hardware is made of 304 stainless steel
- Pre-piping options: Exit Left, Right or Back
- Motors can be changed without removing coil
- Exclusive Omni corrosion resistant coated fin stock on medium temperature coils
- Medium and low temperature applications (electric defrost)
- Mounted drain pan furnishes proper drain slope
- Internal terminal block for electrical connection

Options

- 208 volt 1 phase operation for either domestic or export projects
- Vertical air discharge - optional 45 degree deflector
- Full Prep- basic unit plus factory mounted expansion valve, solenoid valve, thermostat and liquid line strainer
- Slave coil - basic unit plus factory mounted expansion valve only
- Liquid and suction lines are piped out, sealed, tested and shipped under dry nitrogen pressure

Technical Specifications

Model	OTM-Series
Application Focus	Undercounter Refrigerators
Housing Material	Stainless Steel
Voltage	115V / 60Hz
Defrost Method	Air Defrost/Electric Defrost
Refrigerant Compatibility	R-454C / R-448A / R-449A / R-404A

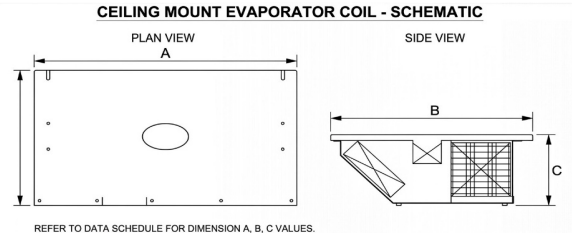

Performance \ Dimensions \ Electrical Data

	OT COIL MODEL	BTUH 10°F TD		DIMENSIONAL DATA			TOTAL CFM	FAN 115V AMPS	DEFROST AMPS	COIL WEIGHT	LIQUID LINE	SUCTION LINE	DRAIN SIZE
		-10°F	+20°F	A	B	C							
CEILING MOUNT COILS	MEDIUM TEMP	OTM-08-W		800			100	0.18		11	1/4"	3/8"	5/8"
		OTM-10-W		1000	16-7.8"	14"	200	0.36		16	1/4"	3/8"	5/8"
		OTM-12-W		1200	16-7.8"	14"	200	0.36		17	1/4"	3/8"	5/8"
		OTM-13-W		1300	20-1/4"	14"	200	0.36		21	1/4"	3/8"	5/8"
		OTM-15-W		1500	20-1/4"	14"	200	0.36		22	1/4"	3/8"	5/8"
		OTM-17-W		1700	20-1/4"	14"	300	0.54		30	1/4"	3/8"	5/8"
CEILING MOUNT COILS	LOW TEMP	OTF-09-W	900		16-7.8"	14"	200	0.36	5.0	17	1/4"	3/8"	5/8"
		OTF-11-W	1100		16-7.8"	14"	200	0.36	5.0	18	1/4"	3/8"	5/8"
		OTF-12-W	1200		20-1/4"	14"	200	0.36	5.0	19	1/4"	3/8"	5/8"
		OTF-13-W	1300		20-1/4"	14"	200	0.36	6.25	20	1/4"	3/8"	5/8"
		OTF-15-W	1500		20-1/4"	14"	300	0.54	6.25	21	1/4"	3/8"	5/8"